

For better tasting fountain beverages that stay carbonated longer. Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear.



Coldrink System 1
System Part No. 9328-01



Coldrink System 2
System Part No. 9328-02



Coldrink System 3
System Part No. 9328-03

BENEFITS

- Removes chlorine and other off tastes and odors that can spoil a drink
- Filters out dirt as small as one-half micron in size.
- Removes asbestos fibers and other harmful contaminants such as *Cryptosporidium* and *Giardia* cysts
- 20" prefilter removes dirt and other large particles and helps maximize the life of MC cartridges
- Keeps drinks carbonated longer
- Protects fountain equipment
- Allows BRIX to stay within manufacturer's recommendation
- Plate-mounted systems for easy installation and start-up.
- NSF Certified under Standards 42 and 53
- WQA Gold Seal Validated for quality and integrity

INSTALLATION TIPS

- Choose a mounting location which is suitable to support the full weight of the system when operating
- Use a 3/8" water line
- Do not braze/solder fittings into connections
- Never use a saddle valve for connection
- Do not exceed service flow rate (refer to other side)
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes**

APPLICATION/SIZING

Single: Dispensers with single carbonator or using up to 25 tanks of syrup or bag-in-box per month

Twin: Dispensers with single carbonator or using up to 50 tanks of syrup or bag-in-box per month

Triple: Dispensers with double carbonator or using more than 50 tanks of syrup or bag-in-box per month

OPERATION TIPS

- Change cartridges:
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi *when the system is operating.*
 - or at least annually

Always flush the filter cartridges when changing.

SPECIFICATIONS

Dimensions: Coldrink 1 30-1/4"H x 20"W x 6"D
 Coldrink 2 30-1/4"H x 23"W x 6"D
 Coldrink 3 30-1/4"H x 23"W x 6"D
 ("H" dimension includes 2-1/2"
 bottom clearance for cartridge changing)

Minimum inlet connection: 3/8" OD tubing

Service flow rate:

Minimum: Single .25 gpm
 Twin .75 gpm
 Triple .75 gpm
 Maximum: Single 1.67 gpm
 Twin 3.34 gpm
 Triple 5.0 gpm

Working pressure: 20-125 psi, non-shock


Maximum temperature: 100°F (38°C)

No electrical connections required.

Shipping weight: Single 18 lbs.
 Twin 23 lbs.
 Triple 27 lbs.

Operating weight: Single 24 lbs.
 Twin 35 lbs.
 Triple 45 lbs.

Inlet/Outlet connection: 3/8" female pipe thread

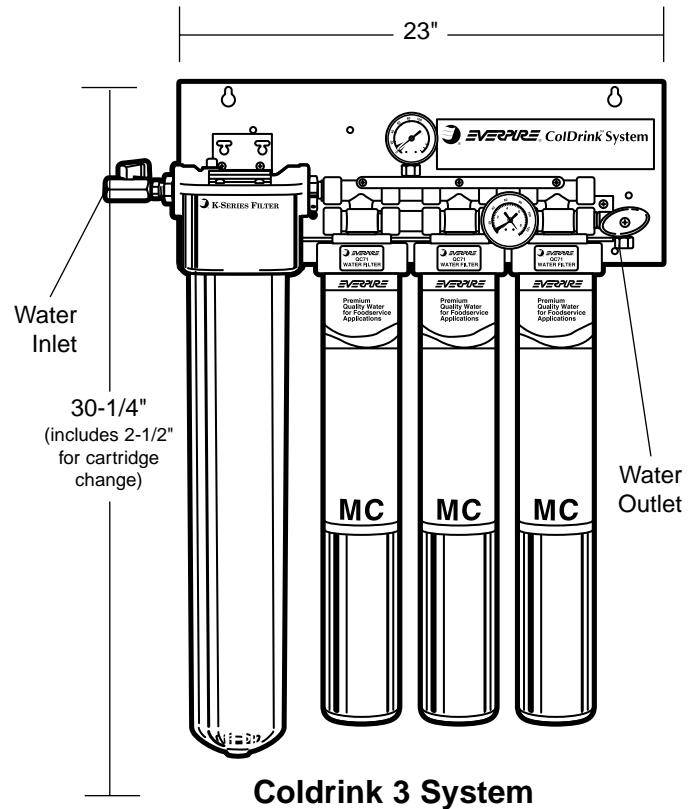

Coldrink 3 System

LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or twelve months after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.



EVERPURE, INC.
 660 Blackhawk Drive
 Westmont, IL 60559-9005
 Tel (630) 654-4000
 FAX (630) 654-1115
 Technical Service
 (800) 942-1153
<http://www.everpure.com>

In Europe:
N.V. EVERPURE (EUROPE)
S.A.
 Research Park, Haasrode
 B-3001 Heverlee
 Belgium
 Tel 32-16-401191
 FAX 32-16-402691

In Japan:
EVERPURE JAPAN, INC.
 1-8-19, Tsumada Kita,
 Atsugi-Shi
 Kanagawa 243
 Japan
 Tel 81-462 (23) 6563
 FAX 81-462 (21) 6775



System Tested and Certified by NSF
 International against ANSI/NSF
 Standard 42 and 53 for the reduction of:

Standard No. 42: Aesthetic Effects
 Chemical Unit
 Taste and Odor Reduction
 Chlorine Reduction, Class I
 Mechanical Filtration Unit
 Particulate Reduction, Class I:
 99.9+% reduction of particles
 one-half micron and larger in size
 Standard No. 53: Health Effects
 Mechanical Filtration Unit
 Turbidity Reduction
 Cyst Reduction
 Asbestos Reduction

Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with waters of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

EVERPURE
 WATER YOU CAN TRUST®